

tertiary

indoor



15 LED 1W

LED power: **15W**

IRC: **80**

Output Lumens: **760 lm (Cool White)**
950 lm (Natural White)
880 lm (Warm White)

ELECTRICAL FEATURES

350mA Power supply, driver not provided

Cable 0,45 m provided

Power consumption: **20W (Cool White)**
21W (Natural White)
21W (Warm White)

ENVIRONMENT

IP: **20**

3 years warranty

NEOS 15 - IP20

Functional lighting - Shops, shop windows, accentuation


MATERIALS

body and ring
in natural anodised
aluminium - satin



individual collimator

heat dissipator in aluminium

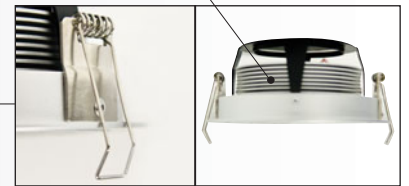


2 springs in steel
for fixing into the false ceiling


Photometric data

Natural White model ; other models, please consult us

Optic: **semi intensive beam 25°**

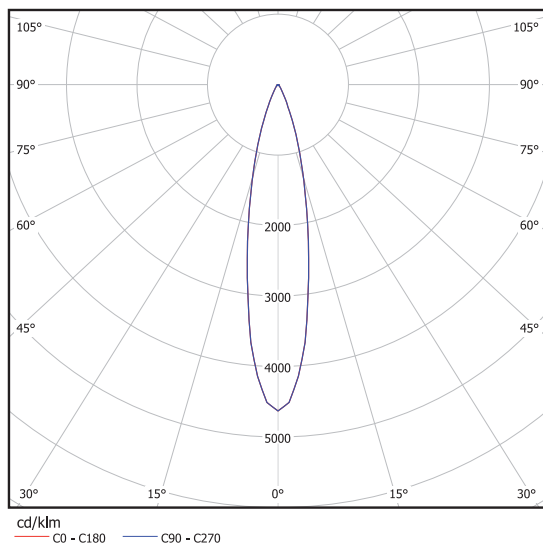


Cone of illumination

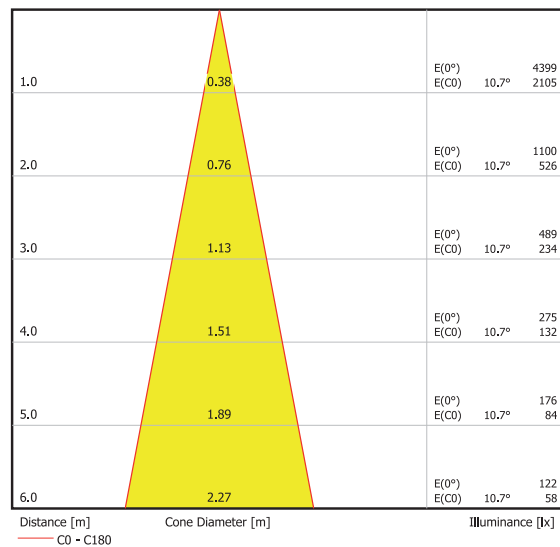


provisional features - all data can be modified without notice

Dimensions unit of measure: millimeter

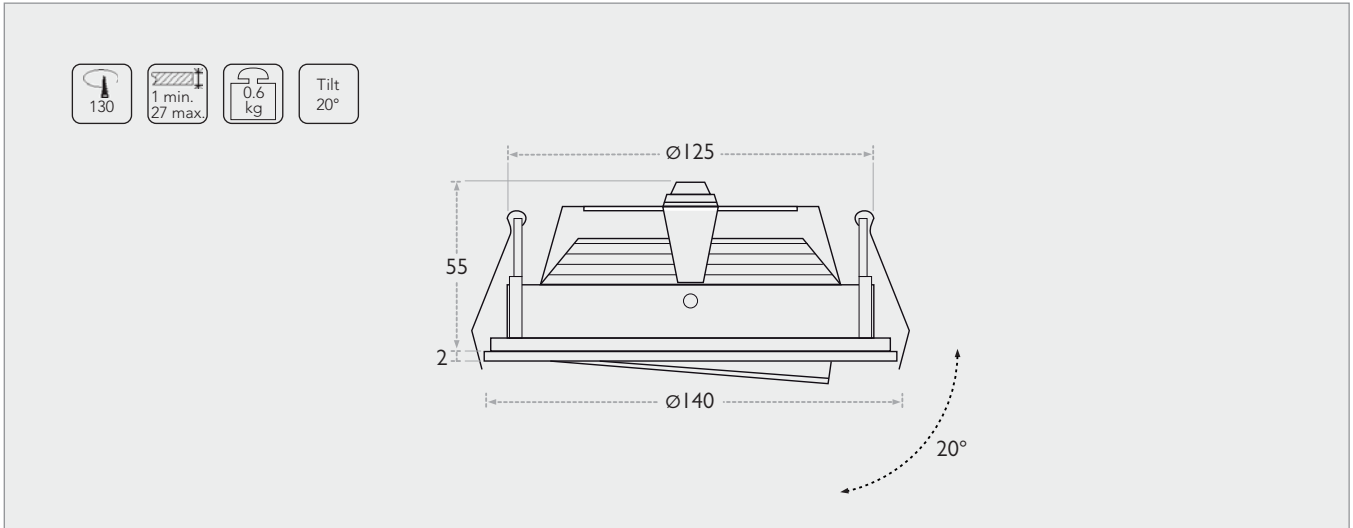


Wiring diagram

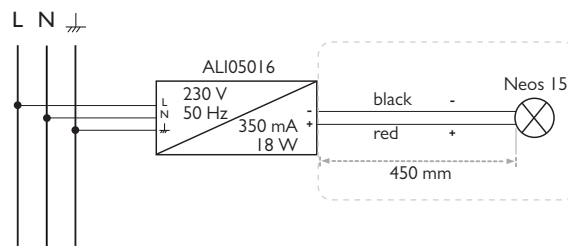

Power supply not provided, to order separately

ALI05016

Dim.: L.105mm - W.75mm - H.30mm

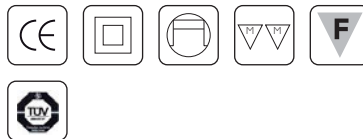

CODE	DESIGNATION	COLORTEMP.
INT04011	Neos 15 - 15W	○ C.W.
INT04012	Neos 15 - 15W	○ N.W.
INT04135	Neos 15 - 15W	○ W.W.
ALI05016	350mA driver - 18W	

C.W. 6000°K; N.W. 4700°K; W.W. 3200°K

provisional features - all data can be modified without notice