

decorative

outdoor



SLIM I

4 LED - 1 side
LED power: **0.4W**
Output Lumens: **10 lm**

SLIM II

8 LED - 2 sides
LED power: **0.8W**
Output Lumens: **21 lm**

SLIM IV

12 LED - 4 sides
LED power: **1.2W**
Output Lumens: **36 lm**

ELECTRICAL FEATURES

Remote 230Vac Power supply, not provided
Cable provided: 1 m (Slim I & II), 40 cm (Slim IV)

ENVIRONMENT


Operating temperature: **-20°C to +50°C**
IP: **68**

3 years warranty


SLIM I / II / IV - IP68

Marking

MATERIALS

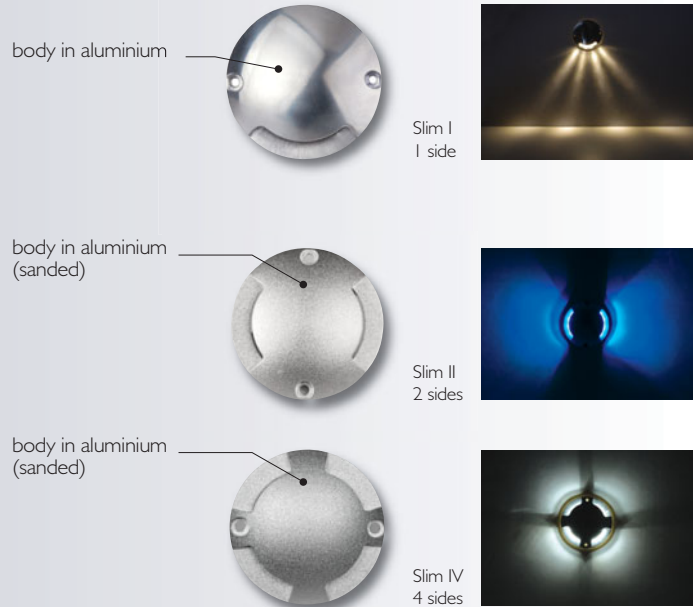

Wiring diagram

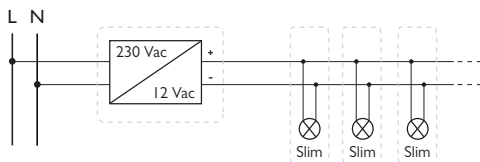

Power supply not provided, to order separately

ALI02018

Dim.: L.95mm - W.40mm - H.45mm



primary 2 m + plug - secondary 2 m

ALI02019

Dim.: L.100mm - W.40mm - H.55mm




primary 2 m + plug - secondary 2 m

ALI02020

Dim.: L.120mm - W.60mm - H.75mm



Dimensions unit of measure: millimeter

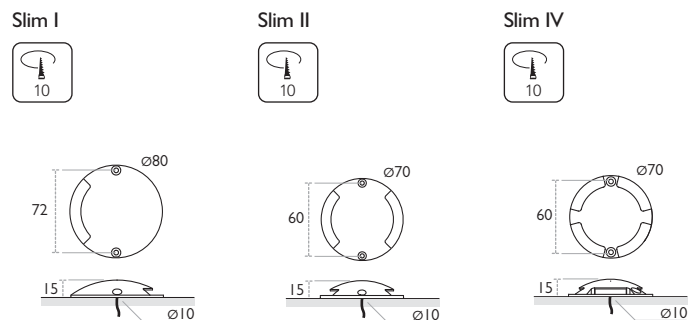

CODE	DESIGNATION	COLOR TEMP.
EXT02073	Slim I	○ C.W.
EXT02072	Slim I	●
EXT02074	Slim II	○ C.W.
EXT02075	Slim II	●
EXT02096	Slim IV	○ C.W.
EXT02097	Slim IV	●
ALI02018	12 Vac driver - 6 VA	
ALI02019	12 Vac driver - 10 VA	
ALI02020	12 Vac driver - 60 VA	

provisional features - all data can be modified without notice